

UNWAVERING QUALITY

TISEL DOUBLE SAFE

Double chrome plating system for more reliability of the hydraulic system

HIGH-PERFORMANCE HYDRAULIC PUMP

- Automatic lifting limitation
- Overload safety valve.
- Infinitely adjustable manual lifting and lowering of forks.

MAST WITH A WIDE FIELD OF VIEW

PLEXGLASS® shield for perfect visibility and safety

BUILT-IN BATTERY CHARGER

Charge at any convenient location to continue working

BATTERY DEEP CYCLE AGM


- Maintenance-free sealed battery with gas-free VRLA-AGM technology
- Charge indicator on the stacker

REINFORCED STIFFENERS

Reduce the possibility of deformation of the forks in case of overloading or improper distribution of the load on the forks.

POLYAMIDE STEERING WHEELS

Mechanical parking brake on right wheel for locking on sloped floor

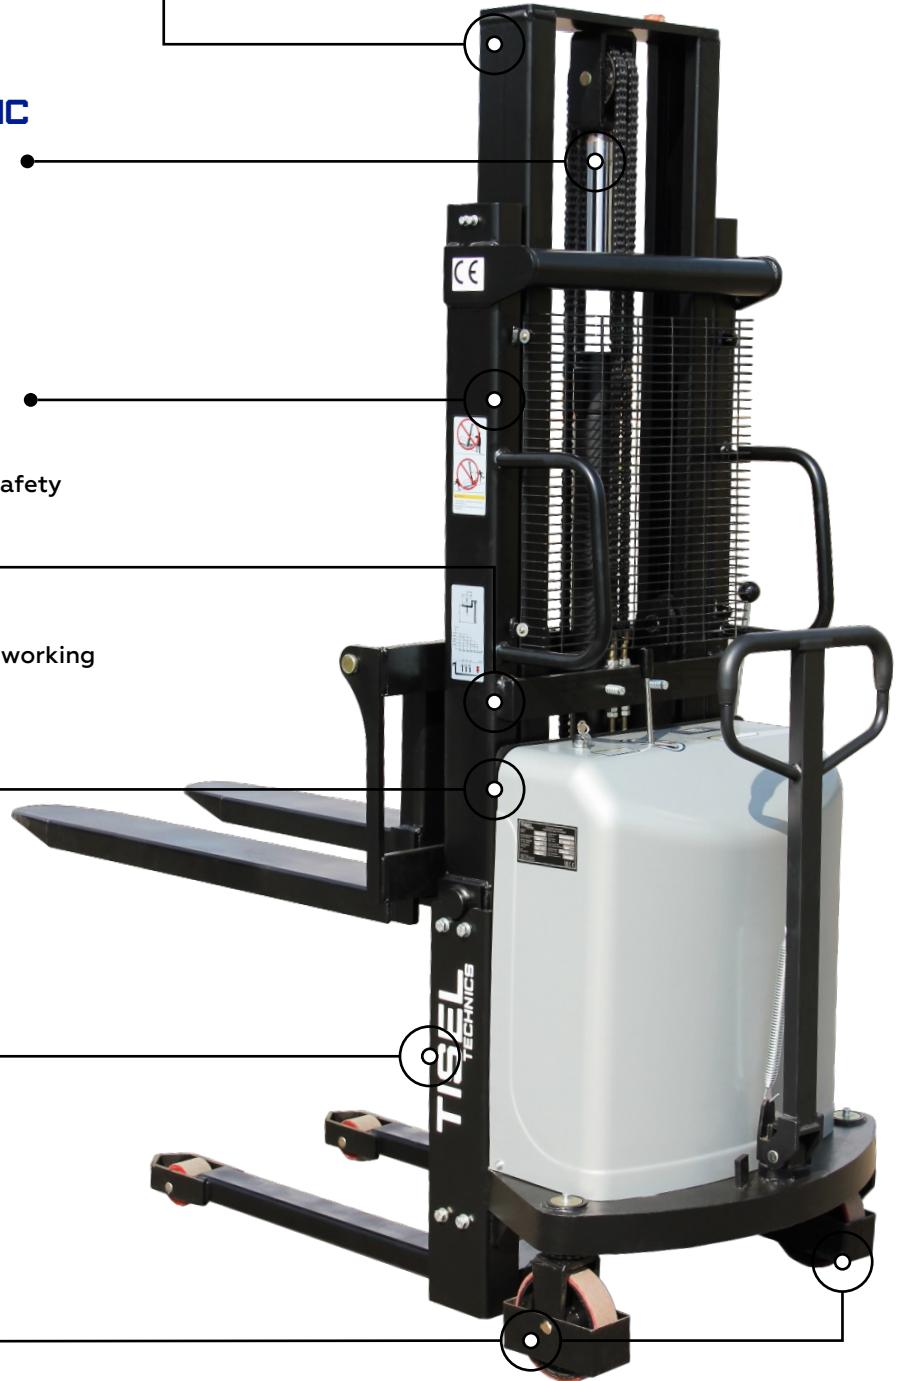

4 YEARS

Extended warranty with timely maintenance

2 LEVELS

Quality control before sale

129K UNITS

The world's sold equipment

Parameter	SES 115
Maximum lifting height (mm)	3500
Maximum load capacity (kg)	1500
Parameters Li-ION battery (optional)	12V / 150Ah
Fork length (mm)	1100
Overall length (mm)	1580
Total width (mm)	777
Working area (800x1200) longitudinally (mm)	2212

FOR THE STRONG OF SPIRIT

HAND LIFT STACKER

HS СЕРИЯ

Specifications:

Load capacity (kg): 500, 1000 and 1500

Lift heights (mm): 1600, 2000, 2500 and 3000

Fork length (mm): 1150

Overall length (mm): 1720

Total width (mm): 850

Minimum height (mm): 2060

Working lane (800x1200) longitudinally (AST) (mm): 1950



TISEL
TECHNICS

**HIGH-PERFORMANCE MATERIAL HANDLING
AND PROMPT SERVICE**

53

Service Centers
worldwide

7

Production sites around the
world

197

Models of material
handling for any business
needs

ORDER ONLY FROM AUTHORIZED DEALERS

+49 (833) 277-22-92

general@tiseltechnics.com

tiseltechnics.com